


# SAFETY STAIR NOSING

## FOR CARPET

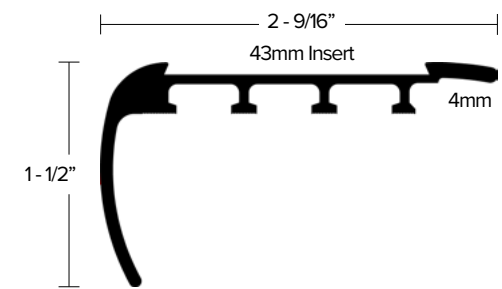


2 - 9/16"

43mm Insert

4mm

1 - 1/2"




**AA121** 1 1/2" Bullnose

BULLNOSE SAFETY STAIR WITH PRE-DRILLED AND COUNTER-SUNK HOLES FOR #4 SCREW 82°

INSERT WIDTH: **43MM**

FINISH: EA, EN, BRZ

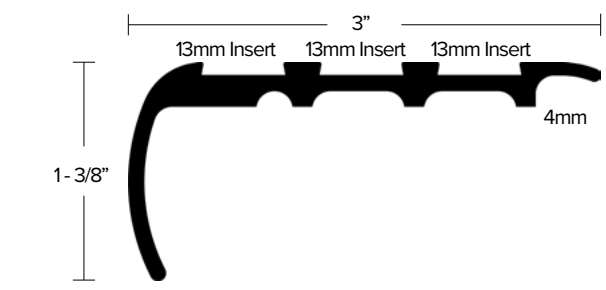


3"

13mm Insert 13mm Insert 13mm Insert

4mm

1 - 3/8"




**AA345** 1 3/8" Bullnose

BULLNOSE SAFETY STAIR WITH PRE-DRILLED AND COUNTER-SUNK HOLES FOR #4 SCREW 82°

INSERT WIDTH: **13MM X 3**

FINISH: EA

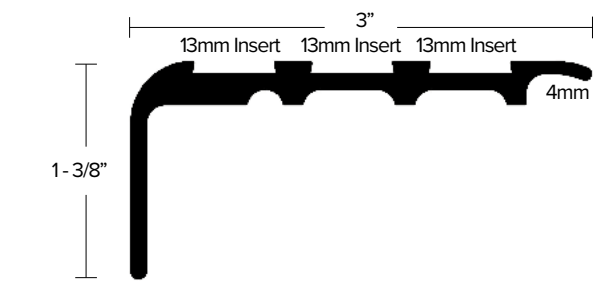


3"

13mm Insert 13mm Insert 13mm Insert

4mm

1 - 3/8"




**AA346** 1 3/8" Right Angle Drop

SAFETY STAIR WITH PRE-DRILLED AND COUNTER-SUNK HOLES FOR #4 SCREW 82°

INSERT WIDTH: **13MM X 3**

FINISH: EA, EN, BRZ

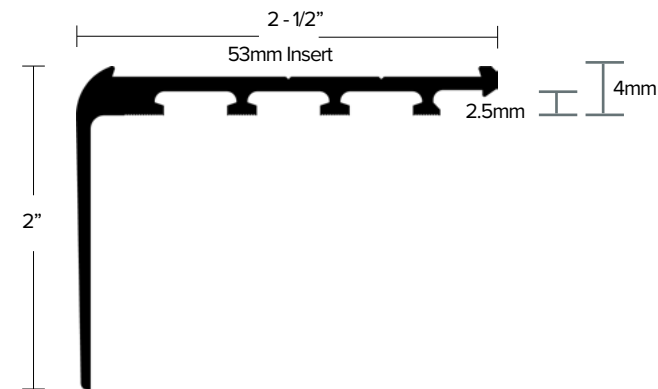


2 - 1/2"

53mm Insert

2.5mm

4mm

2"



**AA123** 2" Right Angle Drop


SAFETY STAIR WITH PRE-DRILLED AND COUNTER-SUNK HOLES FOR #4 SCREW 82°

INSERT WIDTH: **53MM**

FINISH: EA, EN, BRZ

# SAFETY STAIR NOSING


## FOR BARE FLOOR

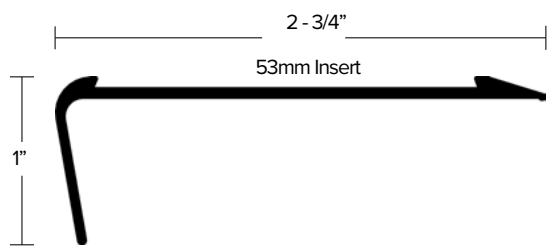

2 - 3/4"

53mm Insert

1"




**AA125** 1" Rake-Back

SAFETY STAIR WITH PRE-DRILLED AND COUNTER-SUNK HOLES FOR #4 SCREW 82°

INSERT WIDTH: **53MM**


FINISH: EA, EN, BRZ

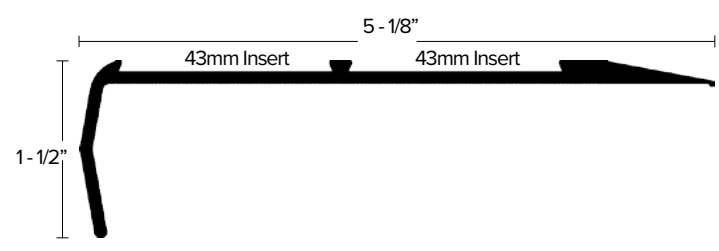

5 - 1/8"

43mm Insert 43mm Insert

1 - 1/2"



**AA207** Extended Bare Floor Nosing


SAFETY STAIR WITH PRE-DRILLED AND COUNTER-SUNK HOLES FOR #4 SCREW 82°

INSERT WIDTH: **43MM X 2**

FINISH: EA, EN, BRZ, EBLK

# SAFETY STAIR NOSING

## FOR CERAMIC FLOOR

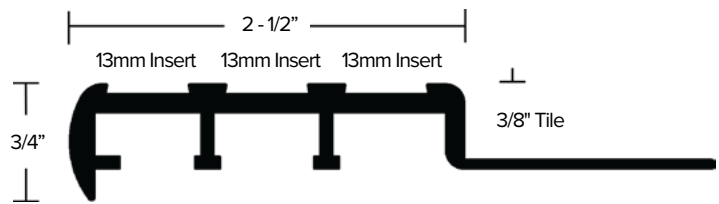


2 - 1/2"

13mm Insert 13mm Insert 13mm Insert

3/8" Tile

3/4"



**AA351** Ceramic Stair Nose

SAFETY STAIR WITH PRE-DRILLED AND COUNTER-SUNK HOLES FOR #4 SCREW 82°

INSERT WIDTH: **13MM X 3**

FINISH: EA, EN, BRZ


Etched Aluminum (EA)




Etched Nickel (EN)



Etched Bronze (BRZ)



Etched Black (EBLK)



### ADA Compliance




Many of the trims and transitions offered by Futura Transitions are compatible with ADA 2010 Standards section 303 Changes in Level and section 504.5 Nosings. However, installers and contractors must ensure that the finished installation, including any Futura Transitions product complies with current ADA standards when the project specifies an ADA requirement. [For more information on ADA standards visit https://www.ada.gov/2010ADASTandards\\_index.htm](https://www.ada.gov/2010ADASTandards_index.htm)

# SAFETY STAIR NOSING


## FEATURING TREDSAFE® INSERTS


 **FUTURA**  
TRANSITIONS

BY BONNELL ALUMINUM



# SAFETY JOINER FOR VINYL





DT025


Safety Joiner


SAFETY JOINER FOR USE WITH 2MM SHEET VINYL. PRE-DRILLED AND COUNTER-SUNK HOLES FOR #4 SCREW 82°

INSERT WIDTH: 53MM

FINISH: EA, EN, BRZ

# SAFETY JOINER FOR CARPET

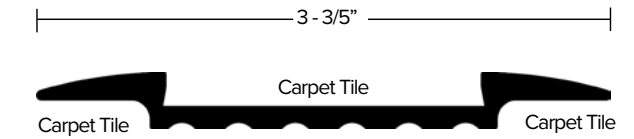



DT026


Safety Joiner


SAFETY JOINER FOR USE WITH CARPET TILE. PRE-DRILLED AND COUNTER-SUNK HOLES FOR #4 SCREW 82°

FINISH: EA, EN, BRZ, EBLK



# SAFETY TRANSITION FOR CARPET

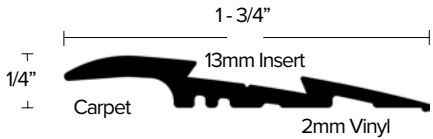




DT024


Sheet Vinyl Transition

SAFETY TRANSITION FOR USE BETWEEN 2MM SHEET VINYL AND CARPET. PRE-DRILLED AND COUNTER-SUNK HOLES FOR #4 SCREW 82°

INSERT WIDTH: 13MM

FINISH: EA, EN, BRZ, EBLK

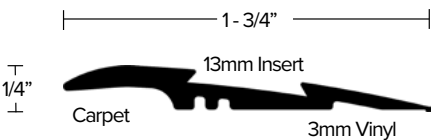




DT027


Carpet to LVT Transition

SAFETY TRANSITION FOR USE BETWEEN 3MM LVT AND CARPET. PRE-DRILLED AND COUNTER-SUNK HOLES FOR #4 SCREW 82°

INSERT WIDTH: 13MM

FINISH: EA, EN, BRZ, EBLK

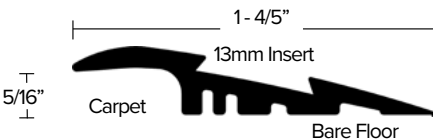




DT028


Carpet to Floor Transition

SAFETY TRANSITION FOR USE FROM CARPET TILE TO NOTHING. PRE-DRILLED AND COUNTER-SUNK HOLES FOR #4 SCREW 82°

INSERT WIDTH: 13MM

FINISH: EA, EN, BRZ, EBLK





DT029

Carpet to LVT Transition

SAFETY TRANSITION FOR USE BETWEEN 5MM LVT AND CARPET. PRE-DRILLED AND COUNTER-SUNK HOLES FOR #4 SCREW 82°

INSERT WIDTH: 13MM

FINISH: EA, EN, BRZ, EBLK

# TREDSAFE® INSERTS

Tredsafe insert is manufactured from a special blend of PVC, silica quartz and polymeric plasticiser giving an homogeneous hard wearing anti-slip flooring for wet and dry conditions. Tredsafe insert is resistant to attack from ultraviolet light, oil, grease, gasoline, salt, dilute acids and alkalis, common household chemicals and detergents. Organic solvents will soften Tredsafe insert. Suitable for interior or exterior use.





NEUTRAL BLACK

SIZES: 13MM, 43MM AND 53MM.





SAFETY ORANGE

SIZES: 13MM, 43MM AND 53MM.





SIGNAL YELLOW

SIZES: 13MM, 43MM AND 53MM.





MID GREY

SIZES: 13MM, 43MM AND 53MM.

SPECIAL ORDER ONLY





RICH BROWN

SIZES: 13MM, 43MM AND 53MM.

SPECIAL ORDER ONLY





CHARCOAL GREY

SIZES: 13MM, 43MM AND 53MM.

SPECIAL ORDER ONLY



# SPECIAL ORDER TREDSAFE INSERTS





SAFETY WHITE

SIZES: 13MM, 43MM AND 53MM.

SPECIAL ORDER ONLY





SAFETY BLUE

SIZES: 13MM, 43MM AND 53MM.

SPECIAL ORDER ONLY





SAFETY GREEN

SIZES: 13MM, 43MM AND 53MM.

SPECIAL ORDER ONLY





SAFETY RED

SIZES: 13MM, 43MM AND 53MM.

SPECIAL ORDER ONLY





LIGHT GREY

SIZES: 13MM, 43MM AND 53MM.

SPECIAL ORDER ONLY





LUMITRED

SIZES: 13MM, 43MM AND 53MM.

SPECIAL ORDER ONLY

