
SAFETY STAIR NOSING **≡ FOR CARPET**






AA121

11/2" Bullnose

BULLNOSE SAFETY STAIR WITH PRE-DRILLED AND COUNTER-SUNK HOLES FOR #4 SCREW 82°

INSERT WIDTH: 43MM

FINISH: EA, EN, BRZ






AA345

13/8" Bullnose

BULLNOSE SAFETY STAIR WITH PRE-DRILLED AND COUNTER-SUNK HOLES FOR #4 SCREW 82°

INSERT WIDTH: 13MM X 3

FINISH: EA






AA346 13/8" Right Angle Drop SAFETY STAIR WITH PRE-DRILLED AND COUNTER-SUNK HOLES FOR #4 SCREW

INSERT WIDTH: 13MM X 3

FINISH: EA, EN, BRZ

SAFETY STAIR NOSING FOR CERAMIC FLOOR





Etched Aluminum

(EA)

Etched Bronze

(BRZ)

AA351

Ceramic Stair Nose

SAFETY STAIR WITH PRE-DRILLED AND COUNTER-SUNK HOLES FOR #4 SCREW

Etched Nickel

(EN)

Etched Black

(EBLK)

INSERT WIDTH: 13MM X 3

FINISH: EA, EN, BRZ




SAFETY STAIR NOSING

FEATURING TREDSAFE® INSERTS

FUTURA

TRANSITIONS

BY BONNELL ALUMINUM



SAFETY STAIR NOSING **≡**

AA123

2" Right Angle Drop

SAFETY STAIR WITH PRE-DRILLED AND


COUNTER-SUNK HOLES FOR #4 SCREW


INSERT WIDTH: 53MM FINISH: EA. EN. BRZ

2 - 1/2"

53mm Insert

FOR BARE FLOOR






FINISH: EA. EN. BRZ



ADA Compliance

Many of the trims and transitions offered by Futura Transitions are compatible with ADA 2010 Standards section 303 Changes in Level and section 504.5 Nosings. However, installers and contractors must ensure that the finished installation, including any Futura Transitions product complies with current ADA standards when the project specifies an ADA requirement. For more information on ADA standards visit https://www.ada gov/2010ADAstandards_index.htm





SAFETY JOINER FOR ≡ VINYL



SAFETY JOINER FOR ≡ CARPET





DT026


Safety Joiner

SAFETY JOINER FOR USE WITH CARPET TILE. PRE-DRILLED AND COUNTER-SUNK HOLES FOR #4 SCREW 82°

FINISH: EA, EN, BRZ, EBLK



SAFETY TRANSITION ≡ FOR CARPET

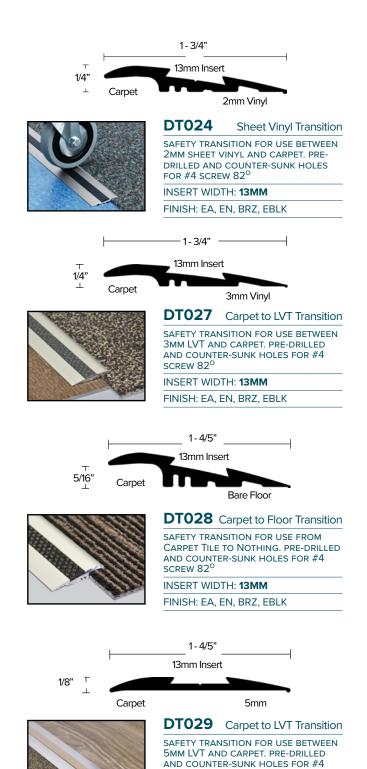

SCREW 82°

INSERT WIDTH: **13MM**FINISH: EA. EN. BRZ. EBLK

TREDSAFE® INSERTS **≡**

Tredsafe insert is manufactured from a special blend of PVC, silica quartz and polymeric plasticiser giving an homogeneous hard wearing anti-slip flooring for wet and dry conditions. Tredsafe insert is resistant to attack from ultraviolet light, oil, grease, gasoline, salt, dilute acids and alkalis, common household chemicals and detergents. Organic solvents will soften Tredsafe insert. Suitable for interior or exterior use.



NEUTRAL BLACK

SIZES: 13MM, 43MM AND 53MM.




SAFETY ORANGE

SIZES: 13MM, 43MM AND 53MM.



SIGNAL YELLOW

SIZES: 13MM, 43MM AND 53MM.



MID GREY

SPECIAL ORDER ONLY



RICH BROWN

SIZES: 13MM, 43MM AND 53MM.

SPECIAL ORDER ONLY



CHARCOAL GREY

SPECIAL ORDER ONLY

SPECIAL ORDER ≡ TREDSAFE INSERTS



SAFETY WHITE

SIZES: 13MM, 43MM AND 53MM.

SPECIAL ORDER ONLY



SAFETY BLUE

SPECIAL ORDER ONLY



SAFETY GREEN

SIZES: 13MM, 43MM AND 53MM.
SPECIAL ORDER ONLY



SAFETY RED

SIZES: 13MM, 43MM AND 53MM.

SPECIAL ORDER ONLY



LIGHT GREY

SIZES: 13MM, 43MM AND 53MM.

SPECIAL ORDER ONLY



LUMITRED

SIZES: 13MM, 43MM AND 53MM.

SPECIAL ORDER ONLY

