



SAFETY STAIR NOSING


FOR CARPET

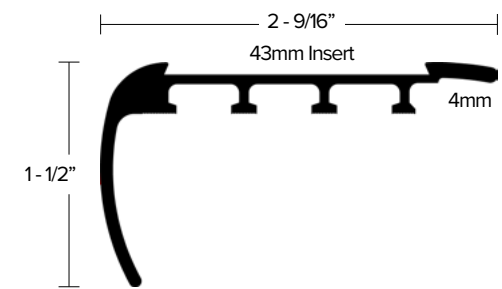


2 - 9/16"
43mm Insert
4mm
1 - 1/2"




AA121 1 1/2" Bullnose
BULLNOSE SAFETY STAIR WITH PRE-DRILLED AND COUNTER-SUNK HOLES FOR #4 SCREW 82°
INSERT WIDTH: **43MM**
FINISH: EA, EN, BRZ

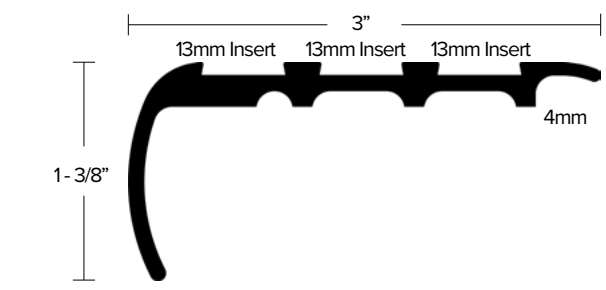


3"
13mm Insert 13mm Insert 13mm Insert
4mm
1 - 3/8"




AA345 1 3/8" Bullnose
BULLNOSE SAFETY STAIR WITH PRE-DRILLED AND COUNTER-SUNK HOLES FOR #4 SCREW 82°
INSERT WIDTH: **13MM X 3**
FINISH: EA

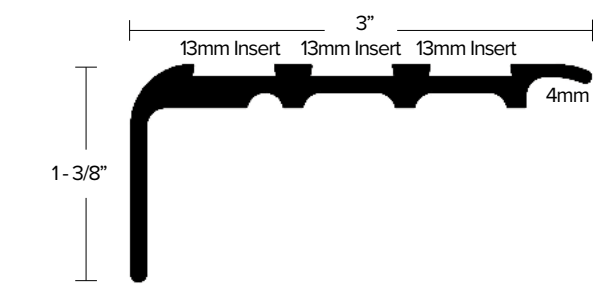


3"
13mm Insert 13mm Insert 13mm Insert
4mm
1 - 3/8"



AA346 1 3/8" Right Angle Drop
SAFETY STAIR WITH PRE-DRILLED AND COUNTER-SUNK HOLES FOR #4 SCREW 82°
INSERT WIDTH: **13MM X 3**
FINISH: EA, EN, BRZ

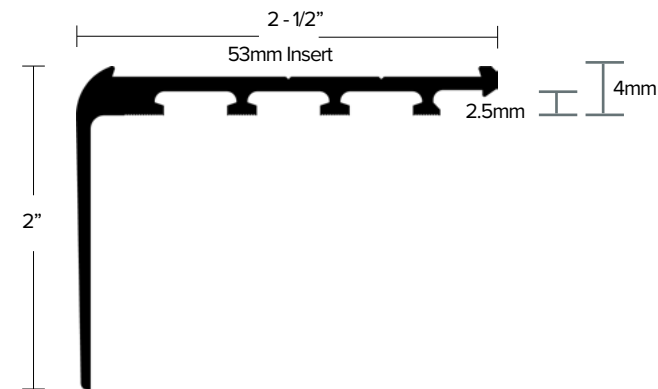


2 - 1/2"
53mm Insert
2.5mm
4mm
2"




AA123 2" Right Angle Drop
SAFETY STAIR WITH PRE-DRILLED AND COUNTER-SUNK HOLES FOR #4 SCREW 82°
INSERT WIDTH: **53MM**
FINISH: EA, EN, BRZ

SAFETY STAIR NOSING


FOR BARE FLOOR

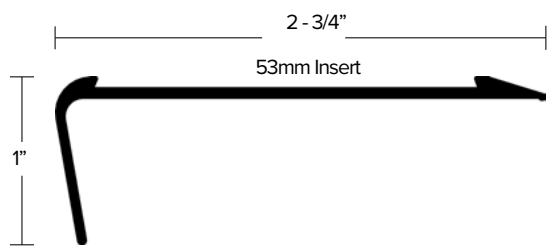


2 - 3/4"
53mm Insert
1"



AA125 1" Rake-Back
SAFETY STAIR WITH PRE-DRILLED AND COUNTER-SUNK HOLES FOR #4 SCREW 82°
INSERT WIDTH: **53MM**
FINISH: EA, EN, BRZ

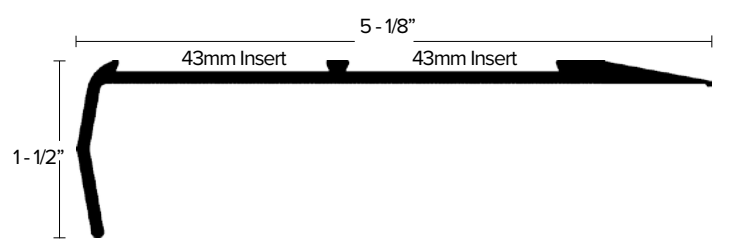


5 - 1/8"
43mm Insert 43mm Insert
1 - 1/2"




AA207 Extended Bare Floor Nosing
SAFETY STAIR WITH PRE-DRILLED AND COUNTER-SUNK HOLES FOR #4 SCREW 82°
INSERT WIDTH: **43MM X 2**
FINISH: EA, EN, BRZ, EBLK

SAFETY STAIR NOSING

FOR CERAMIC FLOOR

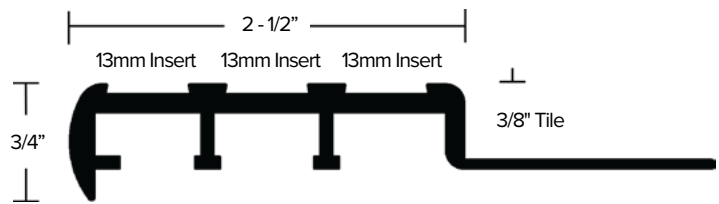

2 - 1/2"
13mm Insert 13mm Insert 13mm Insert
3/8" Tile
3/4"



AA351 Ceramic Stair Nose
SAFETY STAIR WITH PRE-DRILLED AND COUNTER-SUNK HOLES FOR #4 SCREW 82°
INSERT WIDTH: **13MM X 3**
FINISH: EA, EN, BRZ


Etched Aluminum
(EA)




Etched Nickel
(EN)



Etched Bronze
(BRZ)



Etched Black
(EBLK)



ADA Compliance




Many of the trims and transitions offered by Futura Transitions are compatible with ADA 2010 Standards section 303 Changes in Level and section 504.5 Nosings. However, installers and contractors must ensure that the finished installation, including any Futura Transitions product complies with current ADA standards when the project specifies an ADA requirement. [For more information on ADA standards visit https://www.ada.gov/2010ADASTandards_index.htm](https://www.ada.gov/2010ADASTandards_index.htm)

SAFETY STAIR NOSING

FEATURING TREDSAFE® INSERTS

 **FUTURA**
TRANSITIONS

BY BONNELL ALUMINUM





982179/06/25

www.futuratransitions.com
1.800.824.2049



SAFETY JOINER FOR VINYL





DT025


Safety Joiner


SAFETY JOINER FOR USE WITH 2MM SHEET VINYL. PRE-DRILLED AND COUNTER-SUNK HOLES FOR #4 SCREW 82°

INSERT WIDTH: 53MM

FINISH: EA, EN, BRZ

SAFETY JOINER FOR CARPET

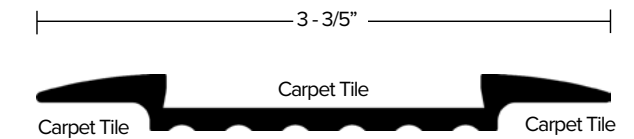



DT026


Safety Joiner


SAFETY JOINER FOR USE WITH CARPET TILE. PRE-DRILLED AND COUNTER-SUNK HOLES FOR #4 SCREW 82°

FINISH: EA, EN, BRZ, EBLK



SAFETY TRANSITION FOR CARPET

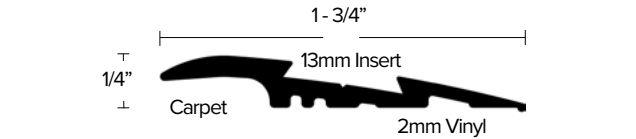




DT024


Sheet Vinyl Transition

SAFETY TRANSITION FOR USE BETWEEN 2MM SHEET VINYL AND CARPET. PRE-DRILLED AND COUNTER-SUNK HOLES FOR #4 SCREW 82°

INSERT WIDTH: 13MM

FINISH: EA, EN, BRZ, EBLK

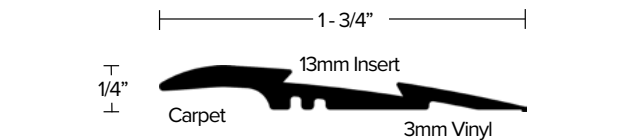




DT027


Carpet to LVT Transition

SAFETY TRANSITION FOR USE BETWEEN 3MM LVT AND CARPET. PRE-DRILLED AND COUNTER-SUNK HOLES FOR #4 SCREW 82°

INSERT WIDTH: 13MM

FINISH: EA, EN, BRZ, EBLK

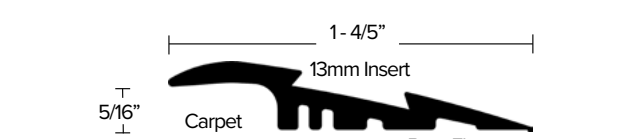




DT028


Carpet to Floor Transition

SAFETY TRANSITION FOR USE FROM CARPET TILE TO NOTHING. PRE-DRILLED AND COUNTER-SUNK HOLES FOR #4 SCREW 82°

INSERT WIDTH: 13MM

FINISH: EA, EN, BRZ, EBLK

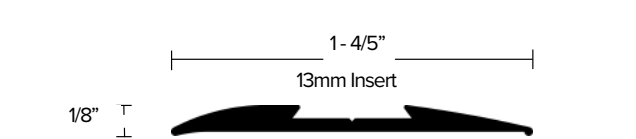



DT029

Carpet to LVT Transition

SAFETY TRANSITION FOR USE BETWEEN 5MM LVT AND CARPET. PRE-DRILLED AND COUNTER-SUNK HOLES FOR #4 SCREW 82°

INSERT WIDTH: 13MM

FINISH: EA, EN, BRZ, EBLK

TREDSAFE® INSERTS

Tredsafe insert is manufactured from a special blend of PVC, silica quartz and polymeric plasticiser giving an homogeneous hard wearing anti-slip flooring for wet and dry conditions. Tredsafe insert is resistant to attack from ultraviolet light, oil, grease, gasoline, salt, dilute acids and alkalis, common household chemicals and detergents. Organic solvents will soften Tredsafe insert. Suitable for interior or exterior use.





NEUTRAL BLACK

SIZES: 13MM, 43MM AND 53MM.





SAFETY ORANGE

SIZES: 13MM, 43MM AND 53MM.





SIGNAL YELLOW

SIZES: 13MM, 43MM AND 53MM.





MID GREY

SIZES: 13MM, 43MM AND 53MM.

SPECIAL ORDER ONLY



RICH BROWN

SIZES: 13MM, 43MM AND 53MM.

SPECIAL ORDER ONLY

CHARCOAL GREY

SIZES: 13MM, 43MM AND 53MM.

SPECIAL ORDER ONLY



SPECIAL ORDER TREDSAFE INSERTS





SAFETY WHITE

SIZES: 13MM, 43MM AND 53MM.

SPECIAL ORDER ONLY





SAFETY BLUE

SIZES: 13MM, 43MM AND 53MM.

SPECIAL ORDER ONLY





SAFETY GREEN

SIZES: 13MM, 43MM AND 53MM.

SPECIAL ORDER ONLY





SAFETY RED

SIZES: 13MM, 43MM AND 53MM.

SPECIAL ORDER ONLY





LIGHT GREY

SIZES: 13MM, 43MM AND 53MM.

SPECIAL ORDER ONLY





LUMITRED

SIZES: 13MM, 43MM AND 53MM.

SPECIAL ORDER ONLY

